




BEARING BOWER CORP.

NA15117SW 90094 Tapered Roller Bearing

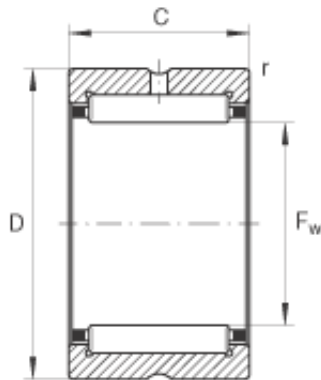

Bearing No. NK22/20

NK22/20 Bearing 2D drawings and 3D CAD models

Size	22x30x20 mm
Bore Diameter	22 mm
Outer Diameter	30 mm
Width	20 mm
F_w	22 mm
D	30 mm
C	20 mm
r_{min}	0,3 mm
m	37 g / Weight
C_r	20000 N / Dynamic load rating (radial)
C_{or}	27000 N / Static load rating (radial)
C_{ur}	4700 N / Fatigue limit load, radial
n_G	20000 1/min / Limiting speed
n_B	10700 1/min / Reference speed
Category	Needle Non Thrust Roller Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0.04
EAN	4012802284805
Product Group	B04144
Rolling Element	Needle Roller Bearing



BEARING BOWER CORP.

Component	Roller Assembly with Outer Ring - No Inner Ring
Enclosure	Open
Self Aligning	No
Retainer	Yes
Number of Rows of Rollers	Single Row
Separable	No
Closed End	No
Inch - Metric	Metric
Relubricatable	Yes
Thrust Bearing	No
Long Description	22MM Bore; 30MM Outside Diameter; 20MM Width; Needle Roller Bearing; Roller Assembly with Outer Ring - No Inner Ring; Open; Not Self Aligning; Retainer; Single Row of Rollers; Not Separable; Not Close
Other Features	2 Rib Outer Ring Radial Precision Steel Cage Ground Raceway with Rib Oil Hole
Category	Needle Non Thrust Roller Bearing
UNSPSC	31171512
Harmonized Tariff Code	8482.99.65.30
Noun	Roller Assembly with Outer Ring
Keyword String	Bearing Needle
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	NK22/20
Weight / LBS	0.082
Width	0.787 Inch 20 Millimeter
Bore	0.866 Inch 22 Millimeter



BEARING BOWER CORP.

Outside Diameter	1.181 Inch 30 Millimeter
------------------	----------------------------