




BEARING BOWER CORP.

Bearing NTN Japan 6204zz 6204DDU 6204llu
6204RS 6205 6208

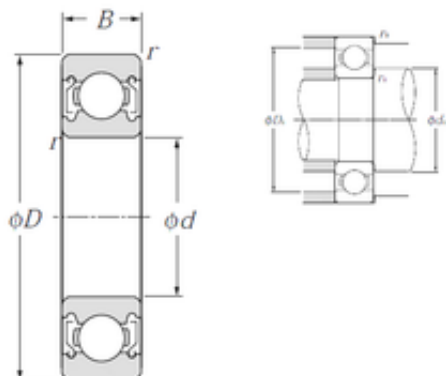

Bearing No. 6204zz

Size	20x47x14 mm
Bore Diameter	20 mm
Outer Diameter	47 mm
Width	14 mm
d	20 mm
D	47 mm
B	14 mm
C	14 mm
rn	0,5 mm
r min.	1 mm
da min.	25 mm
da max	28 mm
Da max.	42 mm
ra max.	1 mm
Weight	0,106 Kg
Basic dynamic load rating (C)	12,8 kN
Basic static load rating (C0)	6,65 kN
(Grease) Lubrication Speed	16 000 r/min
Category	Single Row Ball Bearings
Inventory	2.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.103
EAN	4547359004564
Product Group	B00308

6204zz Bearing 2D drawings and 3D CAD models



BEARING BOWER CORP.

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	20MM Bore; 47MM Outside Diameter; 14MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6204ZZ/3E
Weight / LBS	0.228
Outer Race Width	0.551 Inch 14 Millimeter
Bore	0.787 Inch 20 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter
bore diameter:	20 mm
precision rating:	ISO Class 0
outside diameter:	47 mm
finish/coating:	Uncoated
overall width:	14 mm
bearing material:	High Carbon Chrome Steel



BEARING BOWER CORP.

bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	14 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	14 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	16000 rpm
internal clearance:	CN
fillet radius:	1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	18000 RPM
dynamic load capacity:	12800 N
series:	62
static load capacity:	6650 N
manufacturer product page:	Click here